

WatchGuard® XTM 2 Series

WITH A NEXT-GENERATION WATCHGUARD XTM 25 OR XTM 26 APPLIANCE, YOUR NETWORK IS:

RECOMMENDED FOR SMALL BUSINESSES, REMOTE OFFICES, AND WIRELESS HOTSPOTS

WatchGuard XTM 25 and 26 appliances deliver a new class of performance-driven security. Network protection is stronger than ever, with full HTTPS inspection, VoIP support, and optional application control. Includes five 1GbE ports for faster link speeds, and wireless models have dual-band 802.11/n technology for greater wireless speed and responsiveness.

An XTM 25 or 26 appliance can be used as a stand-alone security solution for a small business, and makes an ideal endpoint for connecting a secure VPN tunnel back to a WatchGuard XTM network.

"We made the decision to go with WatchGuard because one appliance would give us all the security, control, reporting, and visibility we needed."

*Justin Brake
Manager of IT Services
Wireless Express*

SECURE

- Application-layer content inspection recognizes and blocks threats that stateful packet firewalls cannot detect.
- Wide-ranging proxy protection provides robust security on HTTP/HTTPS, FTP, SMTP, POP3, DNS, TCP/UDP.
- Security subscriptions boost protection in critical attack areas for complete unified threat management: blocking spam, controlling dangerous web surfing, preventing network intrusions, and stopping viruses, spyware, and other malware at the gateway.
- Optional Application Control keeps unproductive and dangerous applications off-limits.

EFFICIENT

- Interactive, real-time monitoring and reporting – at no extra charge – give an unprecedented view into network security activity, so you can take immediate preventive or corrective actions.
- Intuitive management console centralizes configurations and streamlines remote management.
- Five 1GbE interfaces allow faster link speeds, which is particularly useful for trusted LAN.
- Drag-and-drop Branch Office VPN setup – three clicks and your remote office is connected.

FLEXIBLE

- Call setup security for VoIP means you don't need to "wire around the firewall" to take advantage of the big cost savings that VoIP can generate.
- WAN and VPN failover provide redundancy for increased reliability.
- Multiple VPN choices deliver flexibility in remote access. Includes IPSec, SSL, and support for iOS devices such as iPhone, iPad, and iPod touch.
- Advanced networking features, like transparent bridge mode and dynamic routing support, allow you to add security without needing to change existing network infrastructure.

WIRED OR WIRELESS – YOUR CHOICE

- Wireless models include optional dual-band 802.11/n technology for much more responsive wireless network connection and expanded range. Allows users to access 2.4 GHz or less crowded 5 GHz band.
- Multiple security zones give administrators precise control over Internet access privileges for different user groups.
- Wireless guest services segment the Internet for customers/guests.

CAPABLE

- Multi-layered, interlocking security protects the network.
- Secure remote connectivity keeps mobile workforce productive.
- Intuitive, centralized management gives you the control you need to manage efficiently.
- Choice of wired or wireless models to suit your specific business requirements.
- Monitoring and reporting tools, included at no extra cost, support industry and regulatory compliance, with drill-down functions that make it easy to pinpoint specific activities.



XTM 2 Series

	XTM 25/25-W	XTM 26/26-W
THROUGHPUT & CONNECTIONS		
Firewall throughput*	240 Mbps	540 Mbps
VPN throughput*	40 Mbps	60 Mbps
AV throughput*	75 Mbps	142 Mbps
IPS throughput*	100 Mbps	200 Mbps
UTM throughput*	35 Mbps	70 Mbps
Interfaces 10/100/1000	5 copper	5 copper
I/O interfaces	1 Serial / 1 USB	1 Serial / 1 USB
Nodes supported (LAN IPs)	Unrestricted	Unrestricted
Concurrent connections (bi-directional)	10,000	30,000
New connections per second	3,000	3,000
Authenticated users limit	500	500
Wireless Available	802.11a/b/g/n	802.11a/b/g/n
VPN TUNNELS		
Branch Office VPN	10	40
Mobile VPN IPsec (included/max)	5/10	5/40
Mobile VPN SSL (included/max)	1/11	1/25

SECURITY FEATURES

Firewall	Stateful packet inspection, deep application inspection, application proxies
Application proxies	HTTP, HTTPS, SMTP, FTP, DNS, TCP, POP3
Threat protection	Blocks spyware, DoS attacks, fragmented & malformed packets, blended threats, and more
VoIP	H.323, SIP, call setup and session security
Security Subscriptions	Application Control, WebBlocker, spamBlocker, Gateway AntiVirus, Intrusion Prevention Service, Reputation Enabled Defense

VPN & AUTHENTICATION

Encryption	DES, 3DES, AES 128-, 192-, 256-bit
IPSec	SHA-1, IKE pre-shared key, 3rd party cert
VPN failover	Yes
SSL	Thin client, Web exchange
PPTP	Server and Passthrough
Single sign-on	Transparent Active Directory Authentication
XAUTH	RADIUS, LDAP, Windows Active Directory
Other user authentication	VASCO, RSA SecurID, web-based, local 802.1X for XTM 2 Series wireless

MANAGEMENT

Management platform	WatchGuard System Manager (WSM)
Alarms and notifications	SNMP v2/v3, Email, Management System Alert
Server support	Logging and Reporting with Server Health status, Quarantine, WebBlocker, Management
Web UI	Supports Windows, Mac, Linux OS
Command Line Interface	Includes direct connect and scripting

STANDARD NETWORKING

QoS	8 priority queues, DiffServ, modified strict queuing
IP Address Assignment	Static, DHCP (server, client, relay), PPPoE, DynDNS
NAT	Static, dynamic, 1:1, IPSec traversal, policy-based

CERTIFICATIONS

Security	ICSA Firewall, ICSA VPN, EAL4+ Pending: FIPS 140-2
Safety	NRTL/C, CB
Network	IPv6 Ready Gold (routing)
Hazardous Substance Control	WEEE, RoHS, REACH

SUPPORT & MAINTENANCE

LiveSecurity® Service	Hardware warranty, 12/5 technical support, software updates, threat alerts Multi-year subscriptions available
-----------------------	--

Networking


	Fireware® XTM	Fireware XTM Pro**
Routing	Static	Dynamic (BGP4, OSPF, RIP v1/2), Policy-based
High Availability†	–	Active/passive, active/active with load balancing
SSL	1 SSL tunnel available	Maximum number of SSL tunnels available by model 50
VLAN support	20	50
Other Features	Port Independence, Transparent/drop-in mode	WAN failover, Multi-WAN load balancing††

DIMENSIONS AND POWER

Product Dimensions - Wired	6.1" x 7.5" x 1.25" (15.5 x 19.0 x 3.2 cm)
Product Dimensions - Wireless (antennae up)	7.75" x 10.75" x 5" (19.7 x 27.3 x 12.7 cm)
Shipping Dimensions	10.75" x 13.25" x 3.4" (27.3 x 33.7 x 8.6 cm)
Shipping Weight - Wired	3.2 lbs (1.45 Kg)
Shipping Weight - Wireless	3.6 lbs (1.6 Kg)
AC Power	100-240 VAC Autosensing
Power Consumption - Wired	U.S. 23.33 Watts (80 BTU/hr)
Power Consumption - Wireless	U.S. 24.0 Watts (82 BTU/hr)
Rack Mountable	No (wall mount bracket included)

ENVIRONMENT

	OPERATING	STORAGE
Temperature	32° F to 104° F 0° C to 40° C	-40° F to 158° F -40° C to 70° C
Relative Humidity	10% to 85% non-condensing	10% to 95% non-condensing
Altitude	0 to 9,843 ft @ 95° F (3,000 m @ 35° C)	0 to 15,000 ft @ 95° F (4,570 m @ 35° C)
	WIRED	WIRELESS
MTBF	129,955 hours @ 104° F (40° C)	103,612 hours @ 104° F (40° C)

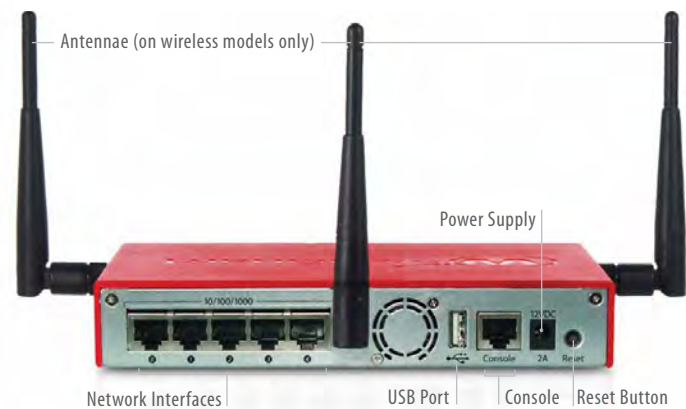

BUY THE BUNDLE AND GET THE WORKS!

Get everything you need for complete unified threat management at a great price with the Security Bundle. Includes choice of any 2 Series appliance (wired or wireless), plus Application Control, WebBlocker, spamBlocker, Gateway AntiVirus, Reputation Enabled Defense, Intrusion Prevention Service, and LiveSecurity Service for support and maintenance.

*Throughput rates will vary based on environment and configuration. Contact your authorized WatchGuard reseller or call WatchGuard directly (1.800.734.9905) for help determining the right model for your network.
**Fireware XTM Pro advanced OS is a purchase upgrade for the XTM 25/25-W and XTM 26/26-W.
†High availability is not available for XTM 25-W or XTM 26-W.
††Server load balancing is not available on 2 Series models.

